

# HEBI ROBOTICS


## 6 Degree-of-Freedom Arm

A fully integrated collaborative manipulation platform.



X-Series Actuators *Default Configuration*	HEBI Mounting Brackets and Wiring Included 3x X5-1 (Wrists) 1x X5-9* (Gripper - Optional) 2x X8-9 (Base and Elbow) 1x X8-16 (Shoulder)
Add-on Accessories	1x Gas Spring ( ↑ Payload, ↓ Workspace) 1x HEBI Parallel Gripper Assembly
Mechanical Interface	T-Slot Extrusion (80/20®) Easy integration of additional components or sensors
Software	Joystick Control with the HEBI Mobile I/O App (iOS & Android) Example code in MATLAB, C, Python, and ROS

Weight (w/ Gripper Assembly)	4.75 kg
Max Reach	750 mm
Payload* @ Max Reach	0.6 kg
Half Reach	375 mm
Payload* @ Half Reach	3.5 kg
Gripper Max Finger Torque (X5-9)	1.1 Nm
Gripper Max Finger Force (50mm from Pivot)	23 N
Parallel Gripper Stroke Length	82 mm
*Payload calculated using default arm configuration w/o a gas spring* Arm and Gripper configuration are customizable upon request.	

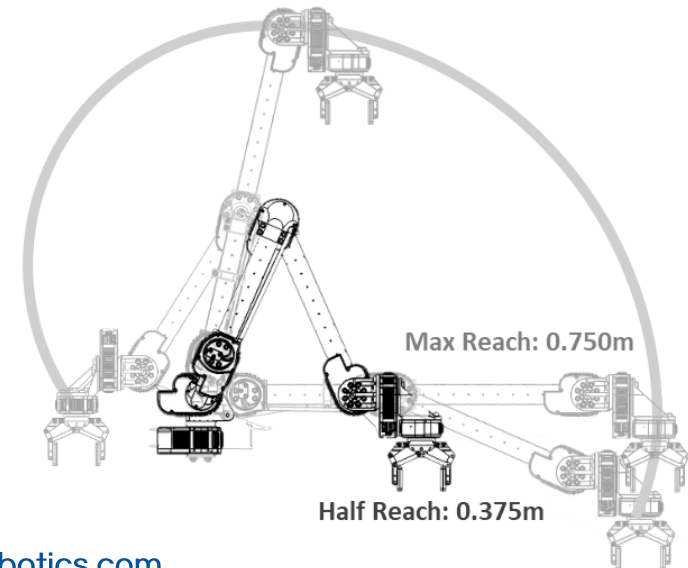

Request a quote at [www.hebirobotics.com](http://www.hebirobotics.com)